




Bearing company

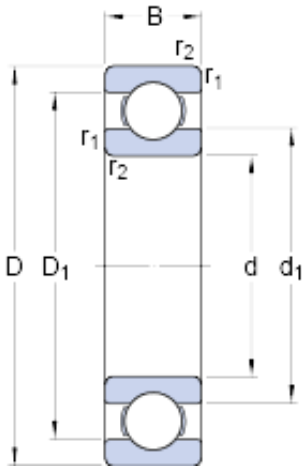

45 mm x 120 mm x 29 mm skf 6409 bearing

Bearing No. 6409

| | |
|---|--------------------------|
| Size | 120x45x29 mm |
| Bore Diameter | 120 mm |
| Outer Diameter | 45 mm |
| Width | 29 mm |
| d | 45 mm |
| D | 120 mm |
| B | 29 mm |
| d ₁ | 68.91 mm |
| D ₁ | 95.85 mm |
| r _{1,2} - min. | 2 mm |
| d _a - min. | 58 mm |
| D _a - max. | 107 mm |
| r _a - max. | 2 mm |
| Basic dynamic load rating - C | 76.1 kN |
| Basic static load rating - C ₀ | 45 kN |
| Fatigue load limit - P _u | 1.9 kN |
| Reference speed | 13000 r/min |
| Limiting speed | 8500 r/min |
| Calculation factor - k _r | 0.035 |
| Calculation factor - f ₀ | 12.1 |
| Category | Single Row Ball Bearings |
| Inventory | 0.0 |
| Manufacturer Name | SKF |
| Minimum Buy Quantity | N/A |
| Weight / Kilogram | 1.581 |

6409 Bearing 2D drawings and 3D CAD models



Bearing company

| | |
|---------------------------------|---|
| EAN | 7316576621154 |
| Product Group | B00308 |
| Enclosure | Open |
| Precision Class | ABEC 1 ISO P0 |
| Maximum Capacity / Filling Slot | No |
| Rolling Element | Ball Bearing |
| Snap Ring | No |
| Internal Special Features | No |
| Cage Material | Steel |
| Internal Clearance | C0-Medium |
| Inch - Metric | Metric |
| Long Description | 45MM Bore; 120MM Outside Diameter; 29MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features |
| Category | Single Row Ball Bearing |
| UNSPSC | 31171504 |
| Harmonized Tariff Code | 8482.10.50.68 |
| Noun | Bearing |
| Keyword String | Ball |
| Manufacturer URL | http://www.skf.com |
| Manufacturer Item Number | 6409 |
| Weight / LBS | 3.48 |
| Bore | 1.772 Inch 45 Millimeter |
| Outer Race Width | 1.142 Inch 29 Millimeter |
| Outside Diameter | 4.724 Inch 120 Millimeter |
| bore diameter: | 45 mm |
| static load capacity: | 45 kN |
| outside diameter: | 120 mm |
| precision rating: | ABEC 1 (ISO Class |



Bearing company

| | |
|--------------------------------|--------------------------|
| | Normal) |
| overall width: | 29 mm |
| finish/coating: | Uncoated |
| bore type: | Round |
| cage material: | Steel |
| closure type: | Open |
| outer ring width: | 29 mm |
| row type & fill slot: | Single Row Non-Fill Slot |
| fillet radius: | 2 mm |
| snap ring included: | Without Snap Ring |
| maximum rpm: | 8500 RPM |
| internal clearance: | C0 |
| series: | 64 |
| dynamic load capacity: | 76.1 kN |
| d_1 | 68.91 mm |
| D_1 | 95.85 mm |
| $r_{1,2}$ min. | 2 mm |
| d_a min. | 58 mm |
| D_a max. | 107 mm |
| r_a max. | 2 mm |
| Basic dynamic load rating C | 76.1 kN |
| Basic static load rating C_0 | 45 kN |
| Fatigue load limit P_u | 1.9 kN |
| Calculation factor k_r | 0.035 |
| Calculation factor f_0 | 12.1 |
| Mass bearing | 1.57 kg |