




## Bearing company

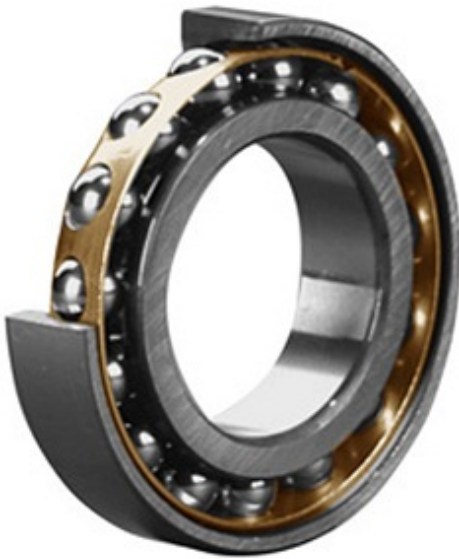

7320 becbm Bearing 2D drawings and 3D CAD models

100 mm x 215 mm x 47 mm skf 7320 becbm bearing

Bearing No. 7320 becbm

Category	Angular Contact Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight	8.01
EAN	7316577095091
Product Group	B00308
Enclosure	Open
Flush Ground	Yes
Rolling Element	Ball Bearing
Number of Rows of Balls	Single Row
Precision Class	ABEC 3   ISO P6
Maximum Capacity / Filling Slot	No
Snap Ring	No
Cage Material	Brass
Contact Angle	40 Degree
Internal Clearance	CB
Number of Bearings	1 (Single)
Mounting Arrangement	Universal
Inch - Metric	Metric
Long Description	100MM Bore; 215MM Outside Diameter; 47MM Width; Open; Yes Flush Ground; Ball Bearing; Single Row of Balls; ABEC 3   ISO P6; No Filling Slot; No Snap



## Bearing company

	Ring
Other Features	Normal Axial Internal Clearance
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Manufacturer Item Number	7320 BECBM
Weight / LBS	17.646
D	8.465 Inch   215 Millimeter
d	3.937 Inch   100 Millimeter
B	1.85 Inch   47 Millimeter
bore diameter:	100 mm
radial static load capacity:	208 kN
outside diameter:	215 mm
cage material:	Brass
overall width:	47 mm
outer ring width:	47 mm
contact angle:	40 °
maximum rpm:	4000 RPM
row type & fill slot:	Single-Row Non-Fill Slot
finish/coating:	Uncoated
internal clearance:	C0
precision rating:	ABEC 3 (ISO Class 6)
closure type:	Open
fillet radius:	2.5 mm
radial dynamic load capacity:	216 kN
series:	73
d	100 mm



## Bearing company

D	215 mm
B	47 mm
$d_1$	144.5 mm
$d_2$	120.46 mm
$D_1$	173.75 mm
a	90 mm
$r_{1,2}$ min.	3 mm
$r_{3,4}$ min.	1.1 mm
$d_a$ min.	114 mm
$D_a$ max.	201 mm
$D_b$ max.	208 mm
$r_a$ max.	2.5 mm
$r_b$ max.	1 mm
Basic dynamic load rating C	216 kN
Basic static load rating $C_0$	208 kN
Fatigue load limit $P_u$	6.95 kN
Reference speed	3800 r/min
Limiting speed	5000 r/min
Calculation factor A	0.63
Calculation factor $k_r$	0.1
Calculation factor e	1.14
Calculation factor X	0.35
Calculation factor $Y_0$	0.26
Calculation factor $Y_2$	0.57
Calculation factor X	0.57
Calculation factor $Y_0$	0.52
Calculation factor $Y_1$	0.55
Calculation factor $Y_2$	0.93
Mass bearing	7.5 kg