




Bearing company

12 mm x 24 mm x 6 mm ntn 6901 bearing

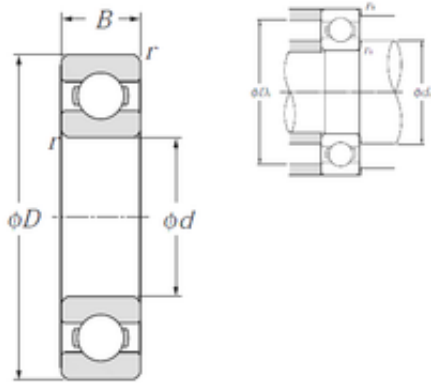

Bearing No. 6901

Size	12x24x6 mm
Bore Diameter	12 mm
Outer Diameter	24 mm
Width	6 mm
d	12 mm
D	24 mm
B	6 mm
C	6 mm
r min.	0,3 mm
da min.	14 mm
da max	15 mm
Da max.	22 mm
ra max.	0,3 mm
Weight	0,011 Kg
Basic dynamic load rating (C)	2,89 kN
Basic static load rating (C0)	1,46 kN
(Grease) Lubrication Speed	27 000 r/min
(Oil) Lubrication Speed	32 000 r/min
rs min	0.3 mm
Radial clearance class	CN
Mass	0.01 kg
Dynamic load, C	2.89 kN
Static load, C0	1.46 kN
Fatigue limit load, Cu	0.07 kN
f0	14.5
Nlim (oil)	32,000 rpm

6901 Bearing 2D drawings and 3D CAD models



Bearing company

Nlim (grease)	27,000 rpm
Min operating temperature, Tmin	-20 ° C
Max operating temperature, Tmax	120 ° C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic rolling element frequency, BSF	5.49 Hz
Characteristic outer ring frequency, BPF0	4.12 Hz
Characteristic inner ring frequency, BRF1	5.88 Hz
da min	14 mm
Da max	22 mm
ra max	0.3 mm
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	0692314578995
Product Group	B00234
Enclosure	Open
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	12MM Bore; 24MM



Bearing company

	Outside Diameter; 6MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Other Features	Deep Groove
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Weight / LBS	0.024
Outside Diameter	0.945 Inch 24 Millimeter
Bore	0.472 Inch 12 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.236 Inch 6 Millimeter
bore diameter:	12 mm
finish/coating:	Uncoated
outside diameter:	24 mm
bearing material:	High Carbon Chrome Steel
overall width:	6 mm
cage material:	Steel
bore type:	Round
inner ring width:	6 mm
closure type:	Open
outer ring width:	6 mm
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	27000 rpm
snap ring included:	Without Snap Ring
maximum rpm (oil):	32000 rpm



Bearing company

internal clearance:	CN
fillet radius:	0.3 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	32000 RPM
dynamic load capacity:	2890 N
series:	69
static load capacity:	1460 N
manufacturer product page:	Click here
precision rating:	Class 0